

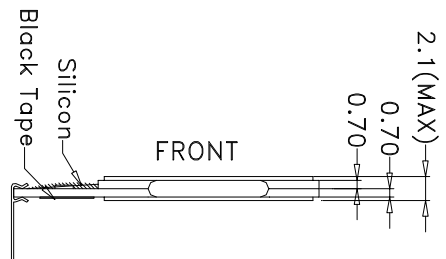
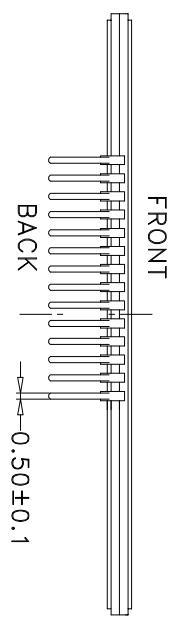


REV	DESCRIPTION:	DATE
1.0		

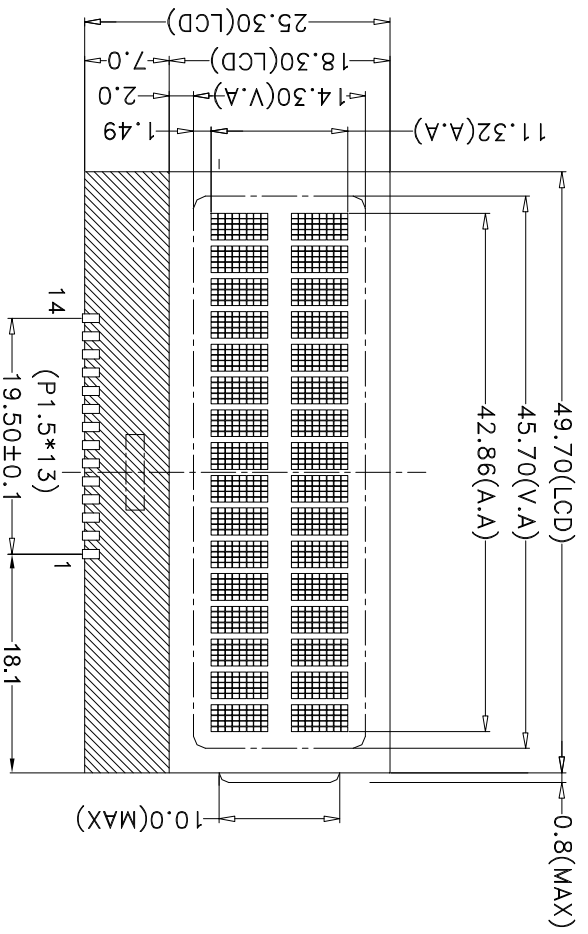

1	VSS
2	V0
3	VDD
4	RS
5	R/W
6	E
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7

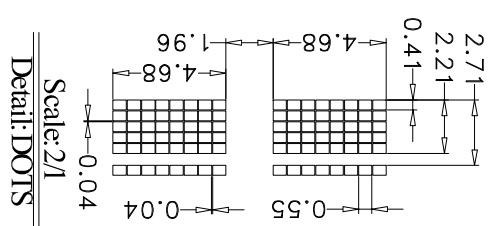

**Display Type** STN GREY/TRANSFLECTIVE/POSITIVE  
**Display Resolution** 16\*2 CHARACTER TYPE  
**Viewing Angle** 6:00  
**Max. Ratio and Bias Level** 1/16 DUTY,1/5 BIAS  
**LCD Controller/Driver** NT7605(COG)  
**Logic Voltage** 5.0±0.5V  
**LCD Driving Voltage** TBD  
**Operation Temperature** 0°C TO 50°C  
**Storage Temperature** -20°C TO 70°C

Model Name: OCUC1602A		OCULAR ENTERPRISES	
GENERAL TOL: ± 0.2	DATE	DRAWN NO.	SCALE: 1:1
APPROVALS		SIZE: A4	UNIT: mm
DWN:			Page: 1-1
CHK:			
APP:			