


REV	DESCRIPTION:	DATE
1.0		

PIN ASSIGNMENT

1	VSS
2	VDD
3	V0
4	C/D
5	/MR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	FS
17	/RST
18	VEE
19	LED+
20	LED-

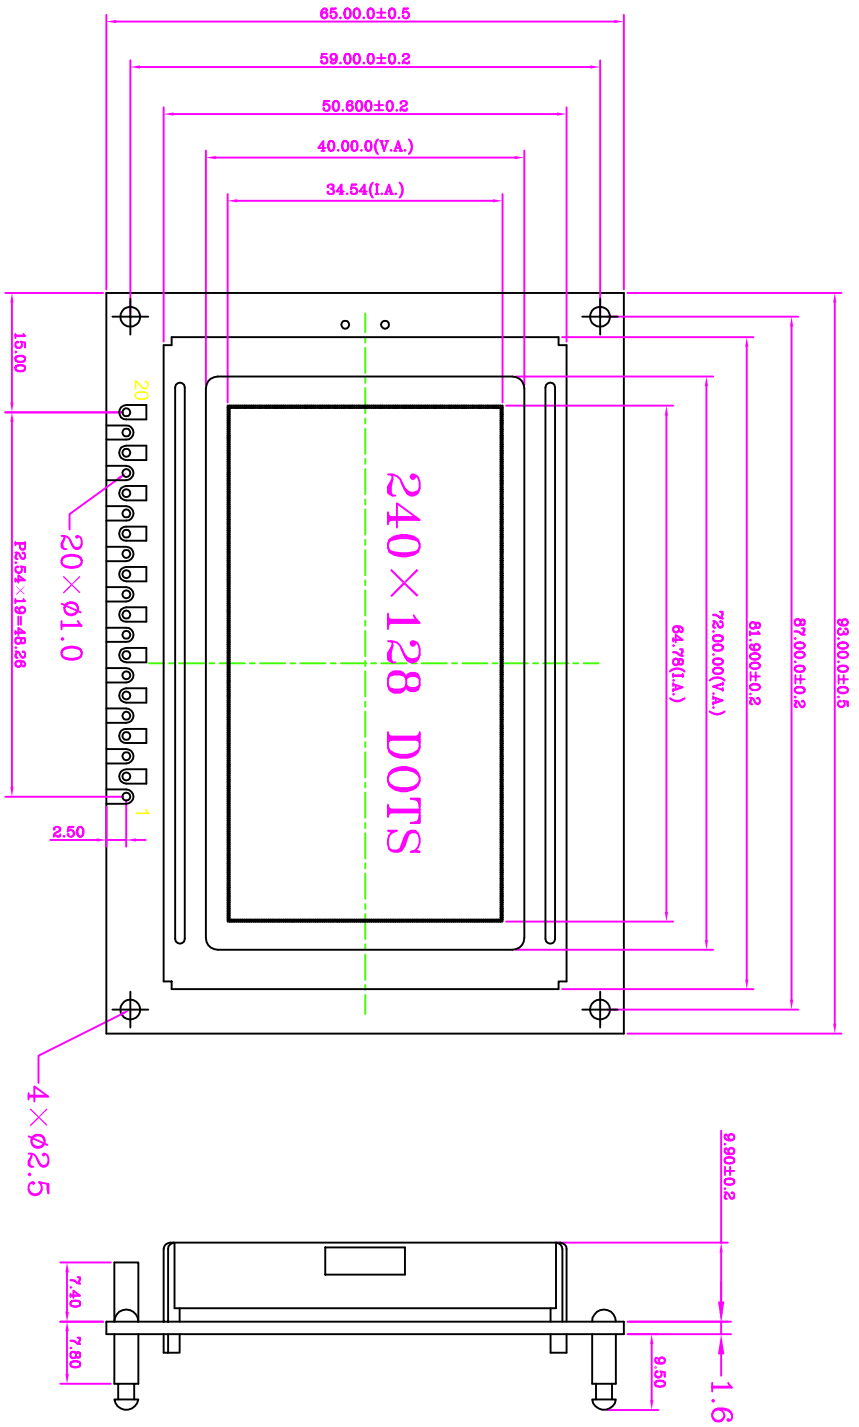

**Specification:**

- 1). Driving: Duty:1/128, 1/12 Bais, Vlcd: 18.5V
- 2). Viewing Direction: 12 0'clock
- 3). Display mode: STN/Blue Mode/Negative/Transflective
- 4). Operating temp.: -10°C~+50°C  
Storage temp.: -20°C~+70°C
- 5). Driver : T6963C or Equivalent(RA8863) Vdd:5.0V
- 6). Unmarked Tolerances: ±0.2mm
- 7). RoHS Compliant

Model Name: OCUT240128C		DRAWN NO.		SCALE: 1:1	
GENERAL TOL: ± 0.3	APPROVALS	DATE	OCULAR ENTERPRISES		
DWN: YE:GUO:XIANG			SIZE: A4		
CHK:			UNIT: mm		
APP:			Page: 1-1		