


REV	DESCRIPTION:	DATE



PIN ASSIGNMENT

1	/CS1
2	/RES
3	A0
4	WR(RW)
5	RE(E)
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	CAP5-
18	CAP3-
19	CAP1+
20	CAP1-
21	CAP2-
22	CAP2+
23	CAP4-
24	VRS
25	V1
26	V2
27	V3
28	V4
29	V5
30	VR
31	C86
32	P/S
33	HPM
34	IRS



SCALE

SCALE=20:1

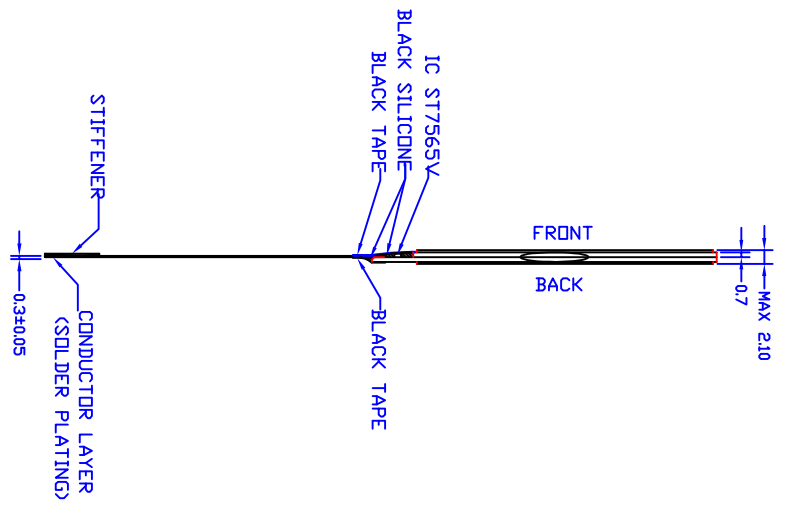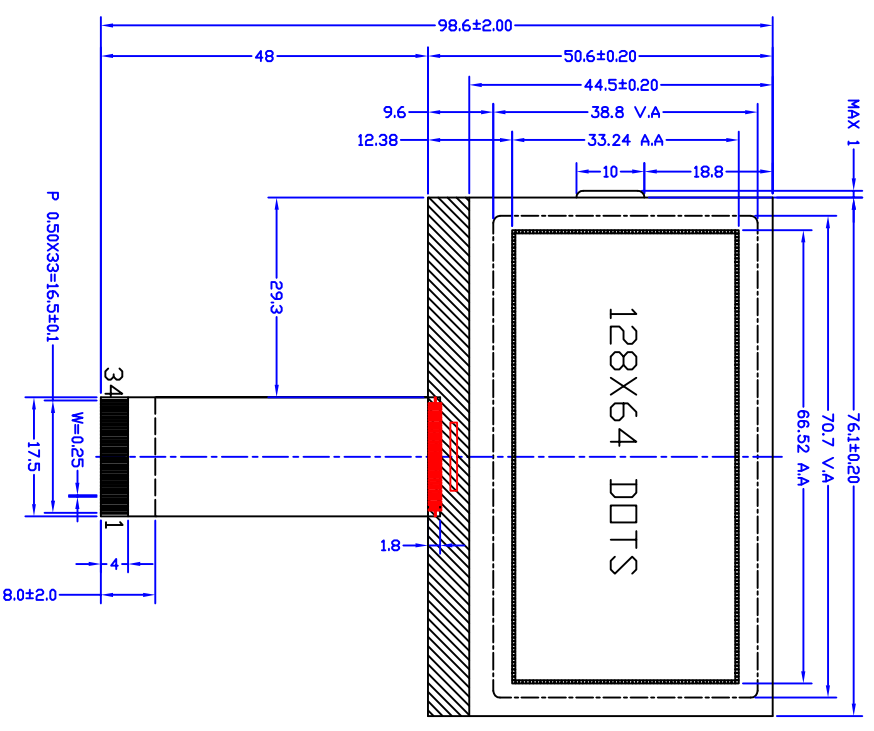

SPECIFICATION:

- 1). DRIVE METHOD: 1/65DUTY, 1/9BIAS, VLCD: 9.8V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). DISPLAY TYPE: FSTN, TRANSMISSIVE/POSITIVE
- 4). OPERATING TEMP: -20C~+80C
- 5). STORAGE TEMP: -30C~+85C
- 6). USE IC: ST7565V(COG)
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED

Model Name: OCU-G12864A00		OCULAR ENTERPRISES	
GENERAL TOL: ± 0.3			
APPROVALS	DATE	DRAWN NO.	SCALE: 1:1
DWN:		SIZE: A4	UNIT: mm
CHK:			Page: 1-1
App:			