


REV	DESCRIPTION:	DATE



PIN ASSIGNMENT

1	RST
2	SCL
3	SDA
4	VSS
5	VDD
6	VOUT
7	C3N
8	C3P
9	C1N
10	C1P
11	C2P
12	C2N

DOTS DETAIL



SCALE=10:1

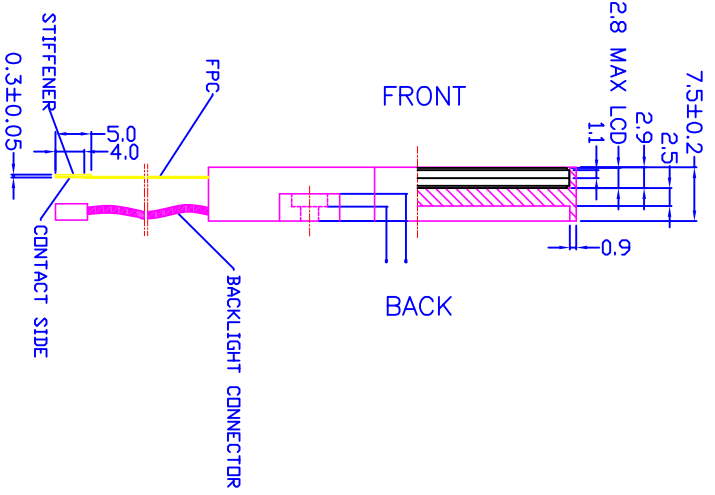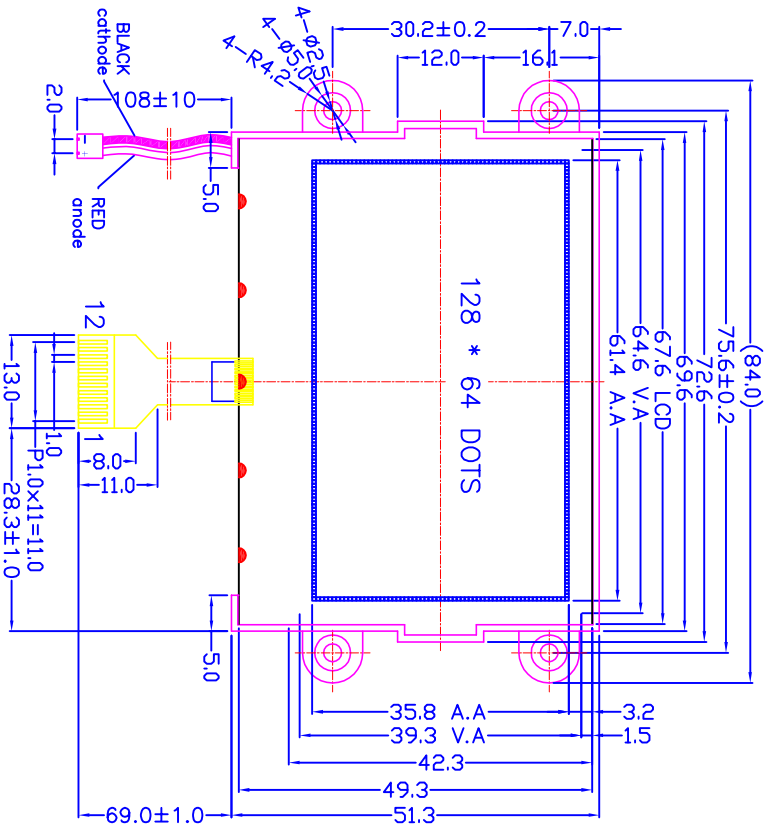

Specification:

- 1). Driving: Duty:1/65, Bias:1/9, VLCD: 9.0V, VDD:3.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: FSTN/Positive/Transflective/Grey
- 4). Operating temp.: -10°C~+50°C
- 5). Storage temp.: -20°C~+60°C
- 5). IC: ST7588i
- 6). Backlight: Yellow-Green, 5pcs LED
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

Model Name: OCU-G12864B00-02		OCULAR ENTERPRISES	
GENERAL TOL: ± 0.3			
APPROVALS	DATE	DRAWN NO.	SCALE: 1:1
DWN:		SIZE: A4	UNIT: mm
CHK:			Page: 1-1
App:			