

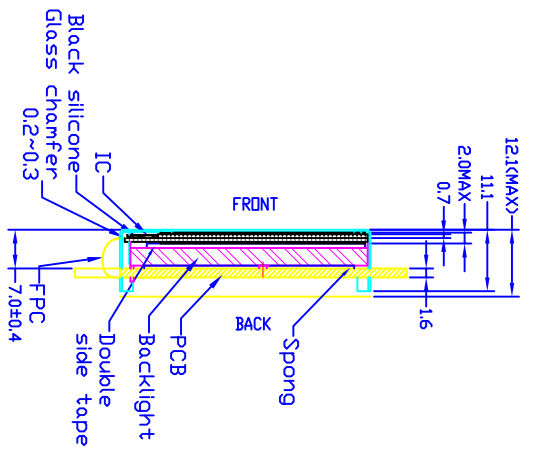
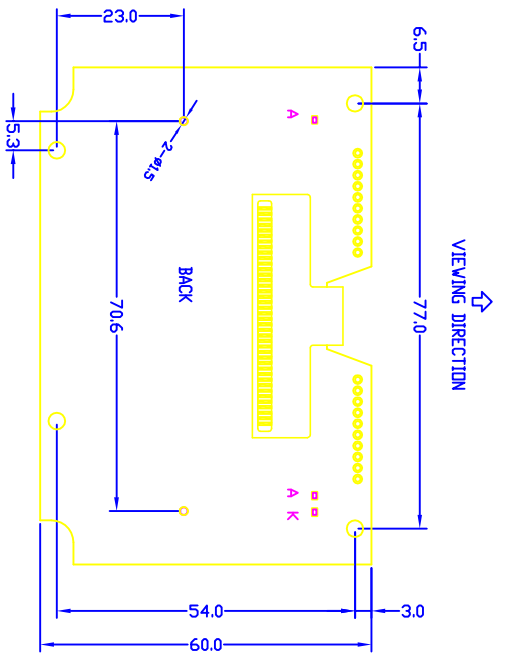


REV	DESCRIPTION:	DATE
5		

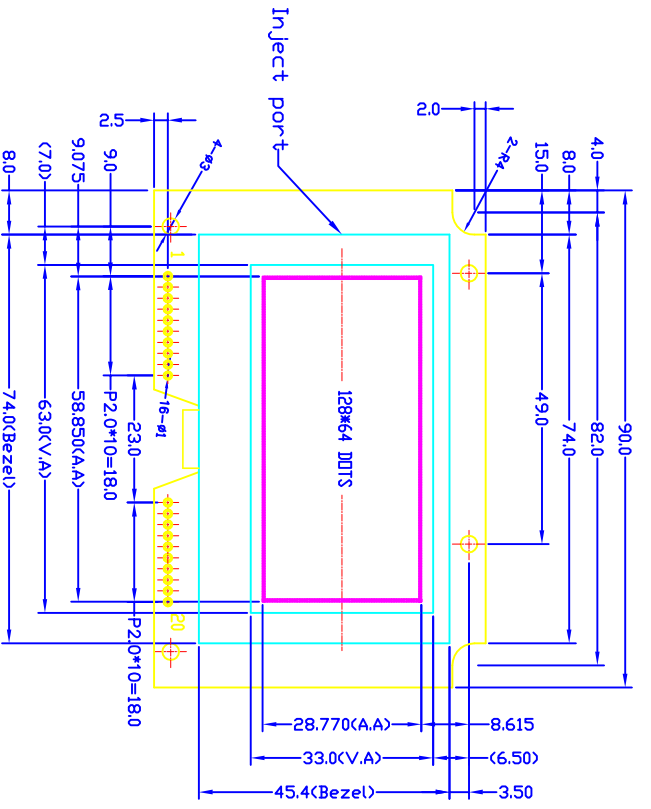

SCALE=10:1

PIN ASSIGNMENT

1	LEDA
2	LEDK
3	GND
4	VDD
5	RS
6	WR
7	E
8	CS
9	NC
10	D0
11	GND
12	D1
13	D2
14	D3
15	GND
16	D4
17	D5
18	D6
19	D7
20	GND

Specification:

- 1). Driving: Duty:1/65, Bias:1/9, VLCD:11.0V, VDD:2.84V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Positive/Transflective/Gray
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 5). IC: ST7565P
- 6). Backlight: Side Yellow-green
- 7). Dimensions with mark "*" are important, with mark "<" are referenced

Model Name: OCU-G12864C00-00		DRAWN NO.		SCALE: 1:1	
GENERAL TOL: ± 0.3					
APPROVALS	DATE	DRAWN NO.		SCALE: 1:1	
DWN:		SIZE: A4		UNIT: mm	
CHK:		Page: 1-1			
App:					

OCULAR ENTERPRISES

A

B

C

D

1

2

3

4

5

6

A

B

C

D

1

2

3

4

5

6