

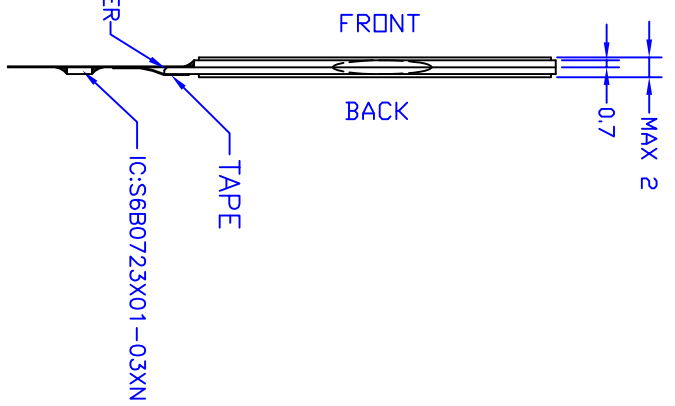


REV	DESCRIPTION:	DATE

PIN ASSIGNMENT

1	NC
2	CS1B
3	CS2
4	RESETB
5	RS
6	RW_WRB
7	E_RDB
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6,SCL
15	DB7,SI
16	DUTY0
17	DUTY1
18	VDD
19	VSS
20	VOUT
21	CAP4+
22	CAP3+
23	CAP1-
24	CAP1+
25	CAP2+
26	CAP2-
27	V1
28	V2
29	V3
30	V4
31	V0
32	VR
33	C68
34	PS
35	INTRS
36	NC

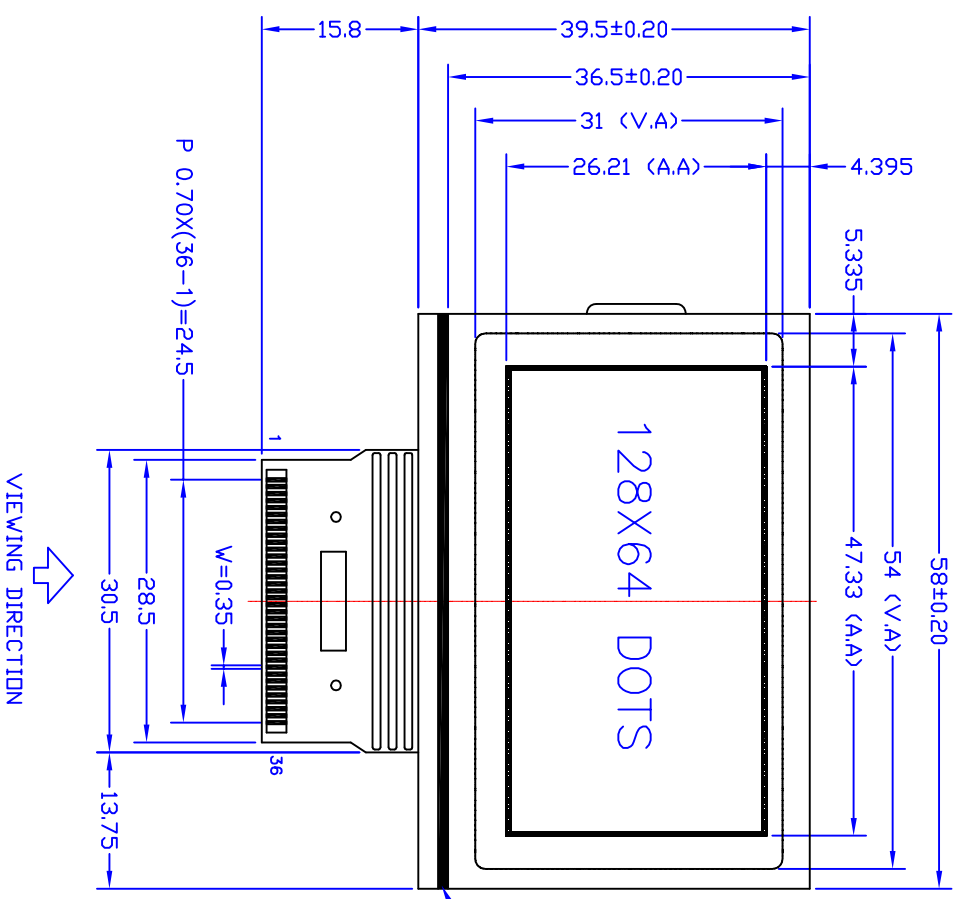

- Specification:
- 1). Driving: Duty:1/64, Bias:1/9, Vdd:3.0V Vlcd:9.5V
 - 2). Viewing angle: 6 O'clock
 - 3). Display mode: FSTN/Positive/Transflective
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Use IC: S6B0723X01-03XN
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced

Model Name: OCU-G12864J00-00		DRAWN NO.	
GENERAL TOL: ± 0.3		SCALE: 1:1	
APPROVALS	DATE	SIZE: A4	UNIT: mm
DWN:			Page: 1-1
CHK:			
APP:			

OCULAR ENTERPRISES