

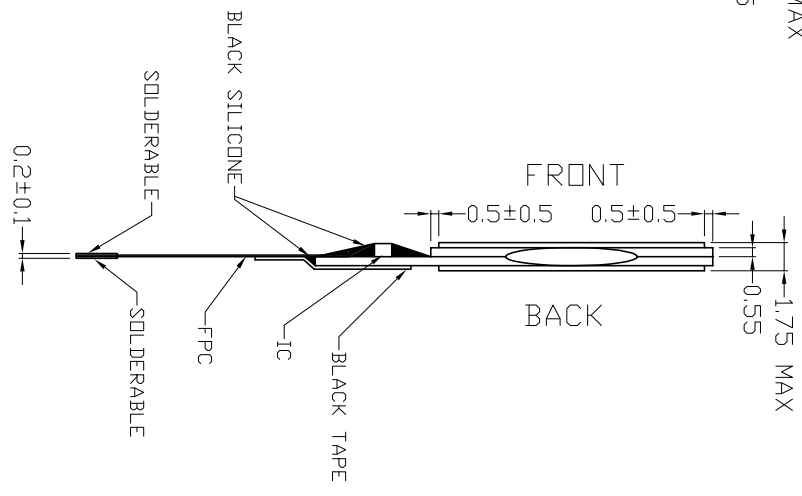


REV	DESCRIPTION:	DATE

VIEWING DIRECTION

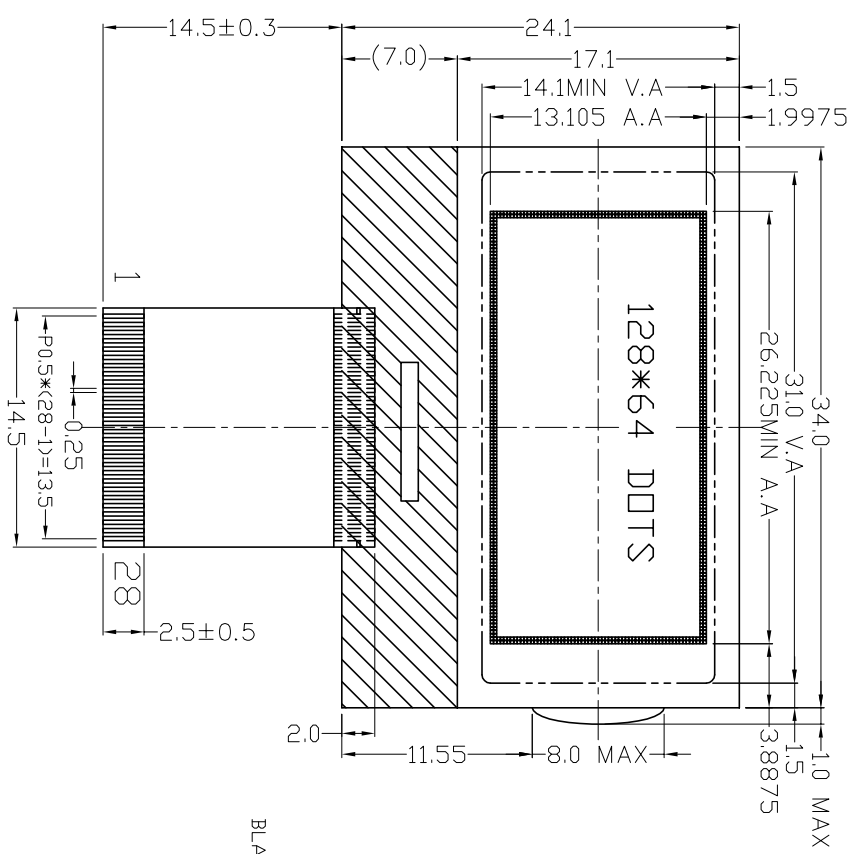

PIN ASSIGNMENT

1	VDD
2	C86
3	VSS
4	V0
5	V4
6	V3
7	V2
8	V1
9	CAP2-
10	CAP2+
11	CAP1+
12	CAP1-
13	CAP3+
14	VOUT
15	VSS
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	RD(E)
25	WR(RW)
26	A0
27	RES
28	CS1

Specification:

- 1). Driving: Duty:1/65, Bias:1/9, VLCD:9.0V, VDD:3.0V
- 2). Viewing angle: 12 °clock
- 3). Display mode:STN/Positive/Transflective
- 4). Operating temp.: -10°C~+60°C
Storage temp.: -25°C~+70°C
- 5). IC: NT7502H-BDT
- 6). Dimensions with mark "*" are important, with mark "<" are referenced

Model Name:	OCU-G12864V1-C601	DRAWN NO.	OCULAR ENTERPRISES
GENERAL TOL:	± 0.3	SCALE:	1:1
APPROVALS	DATE	SIZE:	A4
DWN:		UNIT:	mm
CHK:		Page:	1-1
APP:			