



**Outline Dimension**

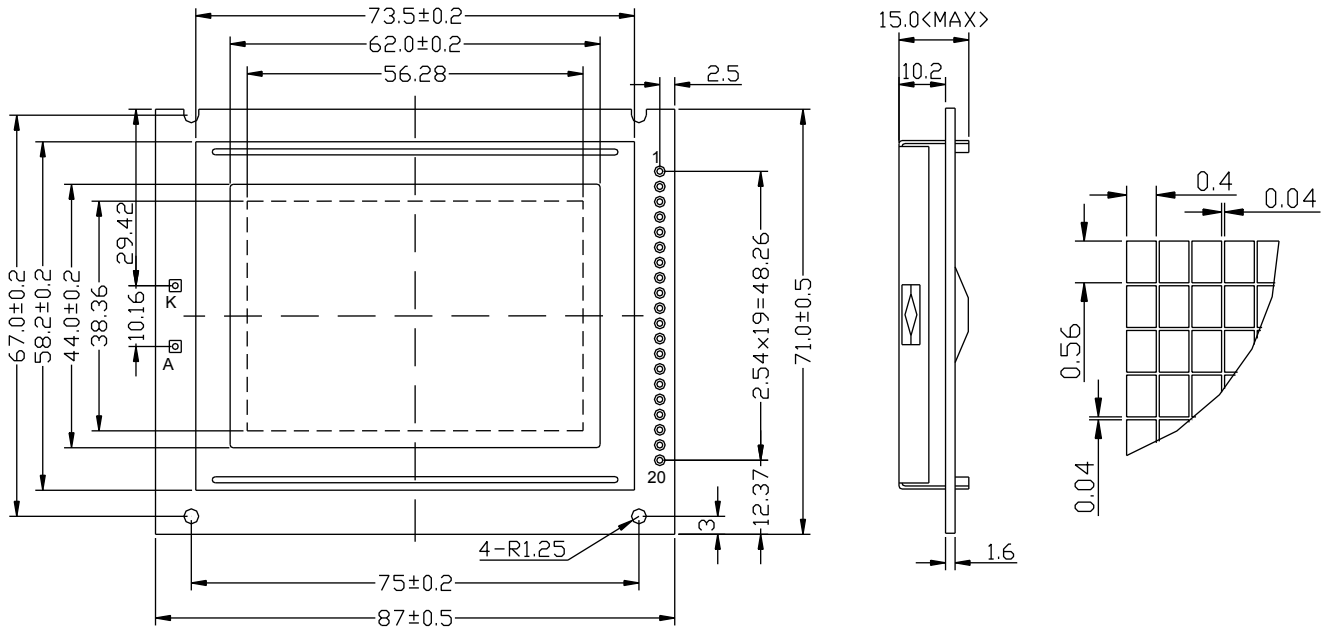

**Block diagram**

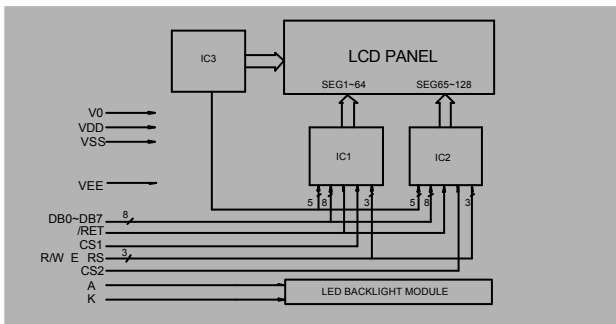

**Interface pin connections**

PIN NO	Symbol	Function
1	VSS	Power supply
2	VDD	
3	VO	Contrast adjustment
4	RS	H/L Register select signal
5	R/W	H/L Read/Write signal
6	E	H/L Enable signal
7-14	DB0-DB7	H/L Data bus for 4 bit or 8 bit mode
15	CS1	Chip select for IC1
16	RST	Reset signal
17	VEE	Negative voltage output
18	CS2	Chip select for IC2
19	NC	-
20	NC	-

**Feature**

1. 128X64 dots graphic LCD module
2. Built-in controller (S6B0108)
3. 5.0V power supply
4. STN; 1/64 duty; LED BKL or EL BKL

**Mechanical Data**

Item	Standard	Unit
Module dimension	78.0x70.0	mm
Viewing area	62.0x44.0	mm
Dot size	0.40x0.56	mm
Dot pitch	0.44x0.60	mm

**Absolute Maximum Rating**

Item	Symbol	Standard			Unit
		Min	Typ	Max	
Power supply	VDD-VSS	-0.3	-----	7.0	V
Input voltage	VI	-0.3	-----	VDD+0.3	

**Electronical characteristics**

Item	Symbol	Condition	Standard			Unit
			Min	Typ	Max	
Input voltage	VDD	-----	4.5	5.0	5.5	V
		-----	2.7	3.0	3.3	
Supply current	I <sub>DD</sub>	VDD=5V	-----	4.5	6.5	mA
Recommended LCD driving voltage for normal temp version module	VDD-V0	-20°C	-----	14.0	-----	V
		0 °C	-----	9.8	-----	
		25°C	-----	9.5	-----	
		50°C	-----	9.3	-----	
		70°C	-----	9.0	-----	
LED forward voltage	VF	25°C	-----	4.2	4.6	V
LED forward current	IF	VF=4.2V	-----	240	-----	mA
EL power supply current	I <sub>EL</sub>	V <sub>EL</sub> =110V AC 400Hz	-----	-----	-----	mA