



REV	DESCRIPTION:	DATE
1.0		

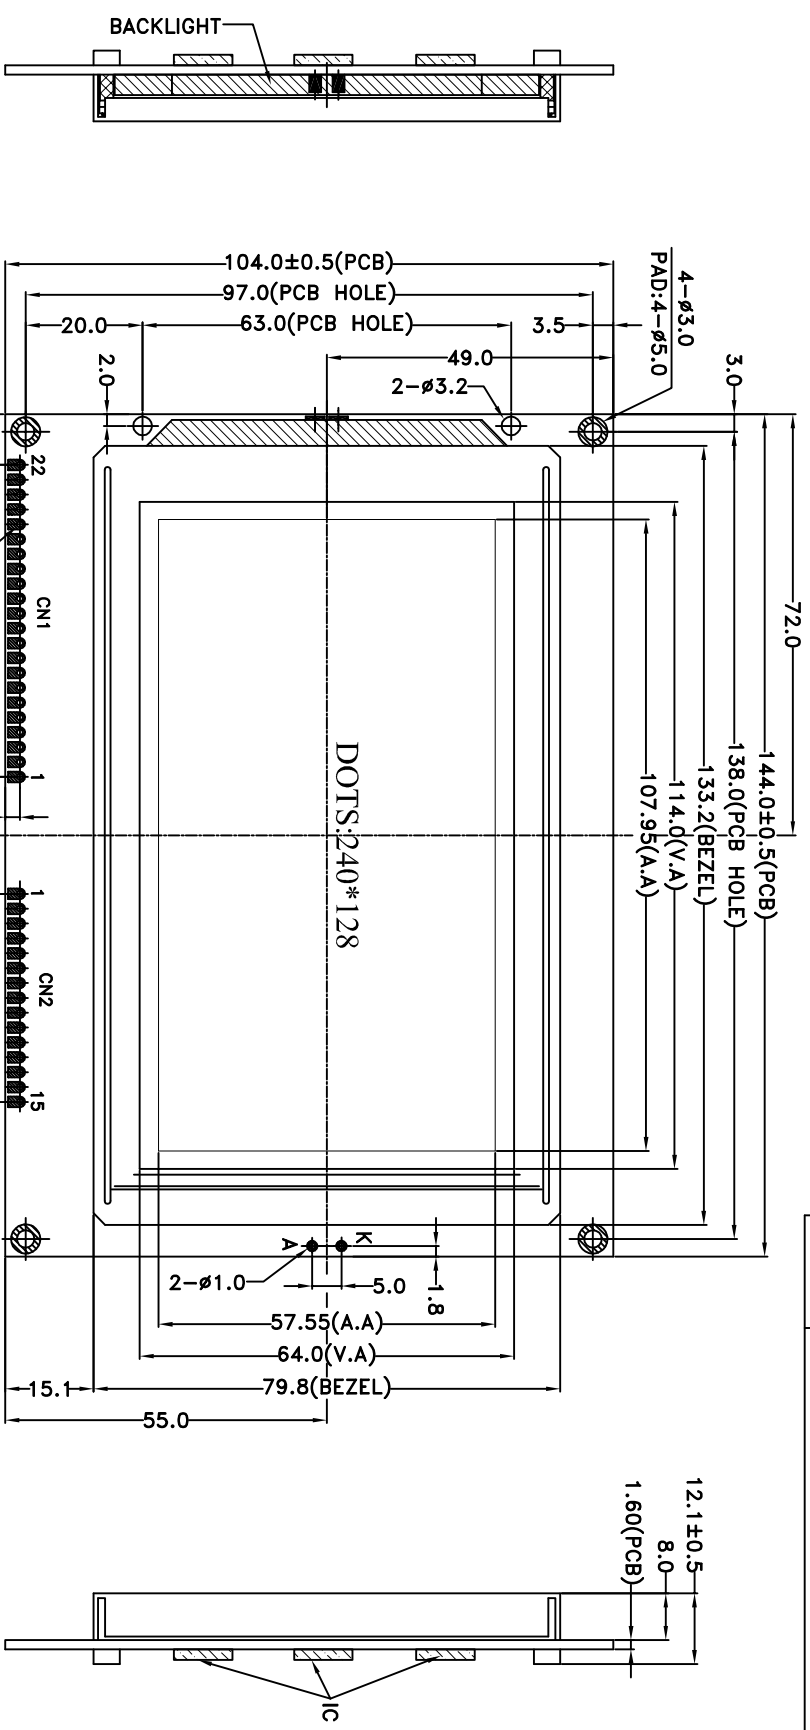

PIN ASSIGNMENT

CN1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	
	T	VSS	VDD	V0	C/D	/RD	/WR	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	DB8	DB9	DB10	DB11	DB12	DB13	DB14	DB15

CN2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	T	FRM	GP	LP	M	VDD	VSS	VEE	DB0	DB1	DB2	DB3	DB4	DB5	DB6



Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VDD:5.0V
- 2). Viewing Direction: 60°clock
- 3). Display mode:STN/Blue/Neagitive
- 4). Operating temp.: -20° c~+70° C
Storage temp.: -30° c~+80° C
- 5). Driver : T6963C or Compatible
- 6). Backlight: White LED backlight

Model Name: OCU240128A-NSW-BBW		SCALE: 1:1	
GENERAL TOL: ±0.3	DATE	DRAWN NO.	
APPROVALS		SIZE: A4	UNIT: mm
DWN:			Page: 1-1
CHK:			
APP:			

OCULAR ENTERPRISES